


CEILING LIGHT WITH SENSOR (Surface Mounted)

ST702B

TECHNICAL FEATURES



IP Rating:	IP20
Size:	ø270 x 103mm
Structure material:	Polycarbonate
Structure finish:	White
Diffuser material:	PMMA
Recommended light bulb:	E27 (max.25W)
Voltage / frequency:	220-240VAC/50-60Hz
Energy efficiency:	Light bulb not included
Ambient Light:	3-2000LUX (adjustable)
Time Delay:	Min: 10sec±3sec Max: 12min±1min
Lampholder:	1 x E27
Additional switching capacity:	300W
Detection Range:	360°
Detection Distance:	1-8m (radius) adjustable
Detection Motion Speed:	0.6-1.5m/s
HF System:	5.8GHz CW radar, ISM band
Transmission Power:	<0.2mW
Installing Height:	2-4m
Power Consumption:	approx0.9W

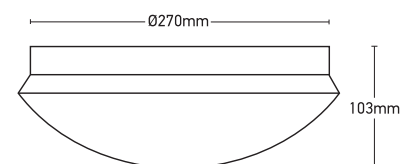

NOTE: It can be transformed to an emergency light with the addition of a driver.